


INSTRUCTION MANUAL

7KW EV CHARGER

APP INTRODUCTION

SKU	DESCRIPTION
11868	7KW EV CHARGER SINGLE PHASE

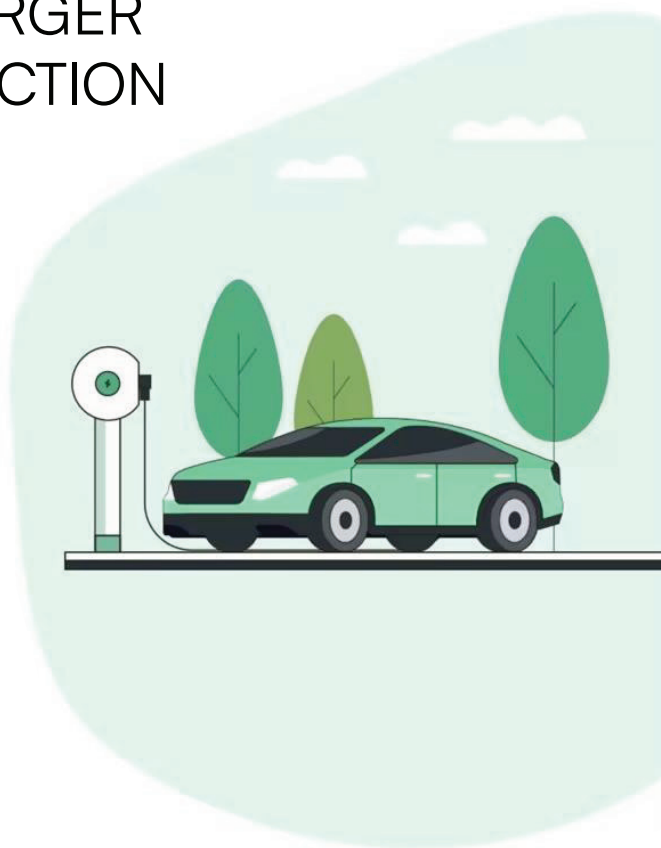

INTRODUCTION

Thank you for selecting and buying V-TAC product. V-TAC will serve you the best. Please read these instructions carefully before starting the installation and keep this manual handy for future reference. If you have any another query, please contact our dealer or local vendor from whom you have purchased the product. They are trained and ready to serve you at the best. The warranty does not apply to damage caused by incorrect installation or abnormal wear and tear. The company gives no warranty against damage to any surface due to incorrect removal and installation of the product. This product is warranted for manufacturing defects only.

Content

I	Register & Log-in	2
1.	Register	2
2.	Log-in.....	2
II	User Information	3
1.	Profile Details	3
2.	Set Language	4
3.	Set Currency	5
4.	Feedback	6
III	To Bind Chargers	7
IV	Charger Details	8
V	Function Introduction	9
1.	Start and Stop Charging	9
2.	Reserve Charging.....	10
3.	Manage Authorization	11
4.	Data Analysis	12
5.	Configuration Setting	13
6.	Maintenance Setting.....	14
7.	Firmware Update	16

I Register & Log-in

1. Register

Log in **Register**

 Enter email

 Please enter verification code [Verification code](#)

[Forgot my password](#)

Next

By logging in or registering, you have read and agreed
《User Agreement》 and 《Privacy policy》

Set password

 Enter password(8-20 digits)

 Confirm password

Confirm

By logging in or registering, you have read and agreed
《User Agreement》 and 《Privacy policy》

2. Log-in

14:31 5G 64

Log in **Register**

 Enter email

 Enter password

[Forgot my password](#)

Log in

By logging in or registering, you have read and agreed
《User Agreement》 and 《Privacy policy》

Note: If you forget your password, you can enter the registered email and get a verification code to reset your password.

Forgot my password

 Enter email


 Please enter verification code [Verification code](#)

Next


By logging in or registering, you have read and agreed
《User Agreement》 and 《Privacy policy》

II User Information



1. Profile Details

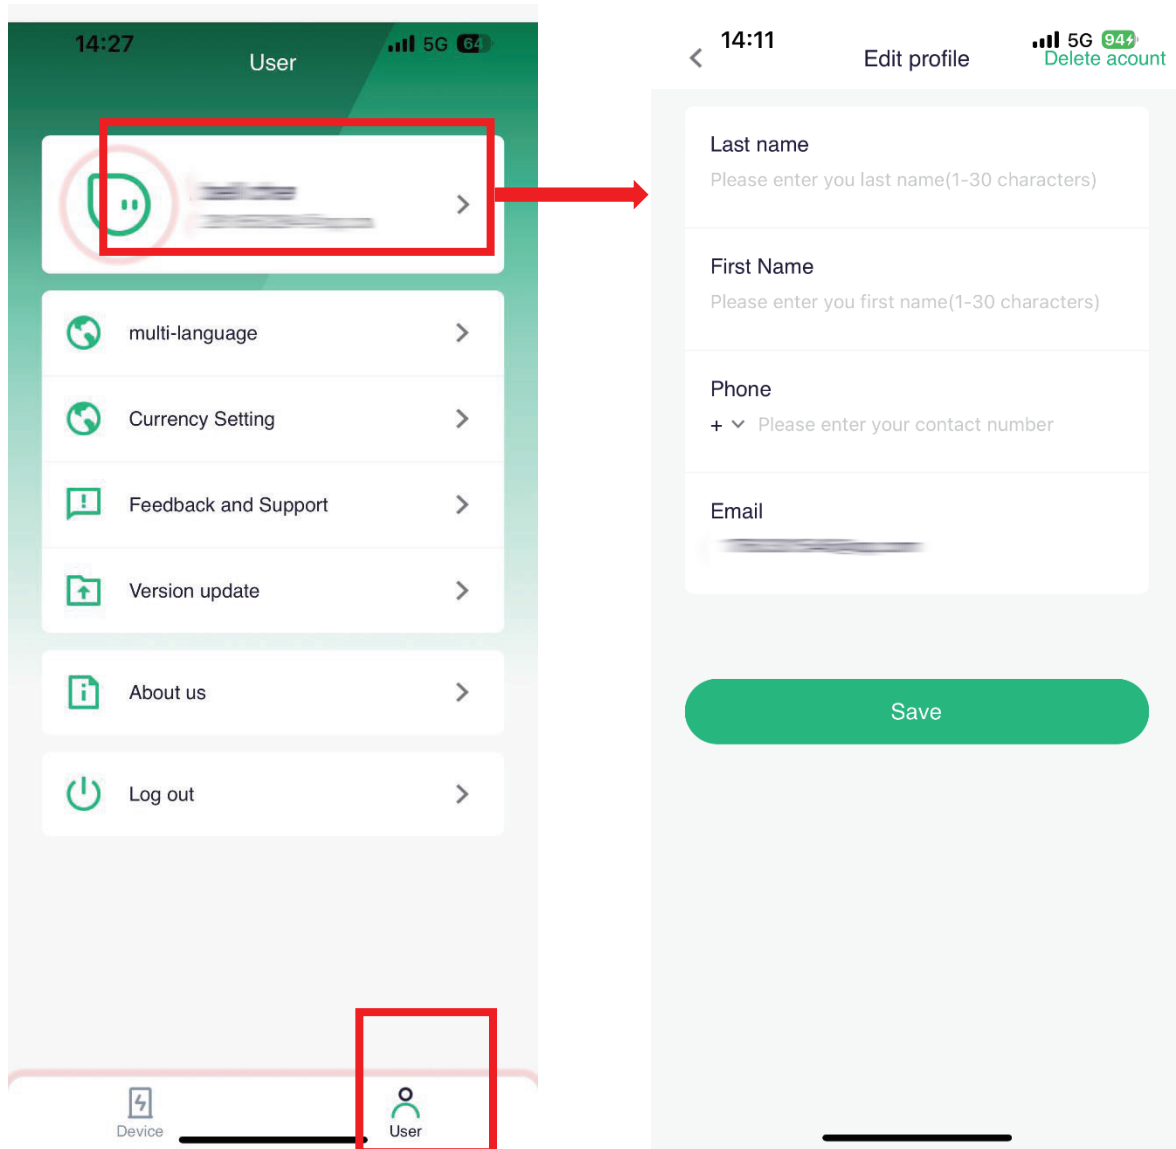



2. Set Language

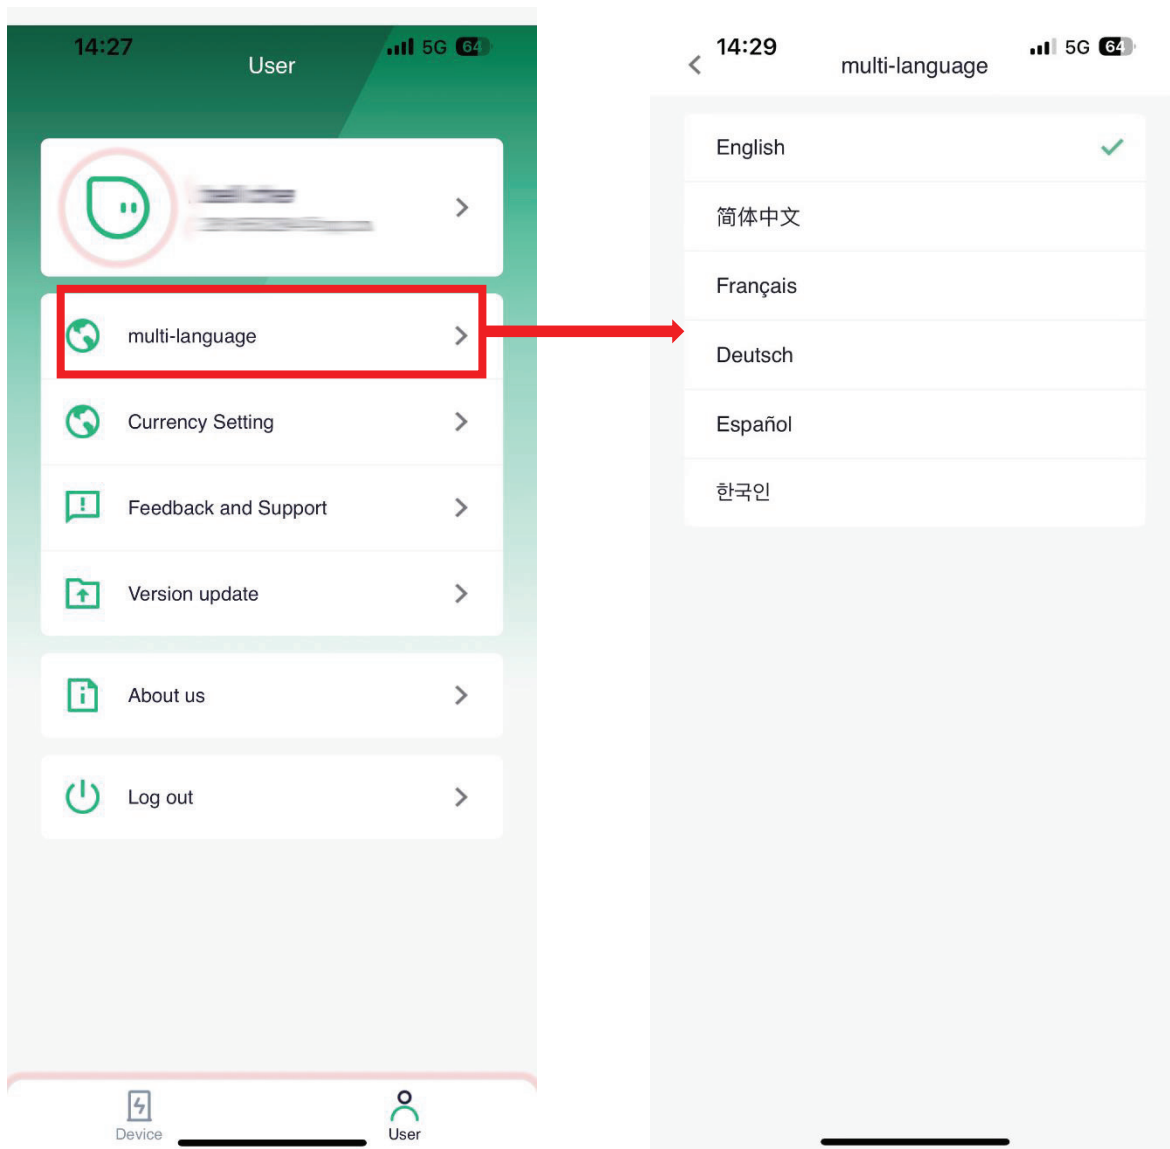

3. Set Currency

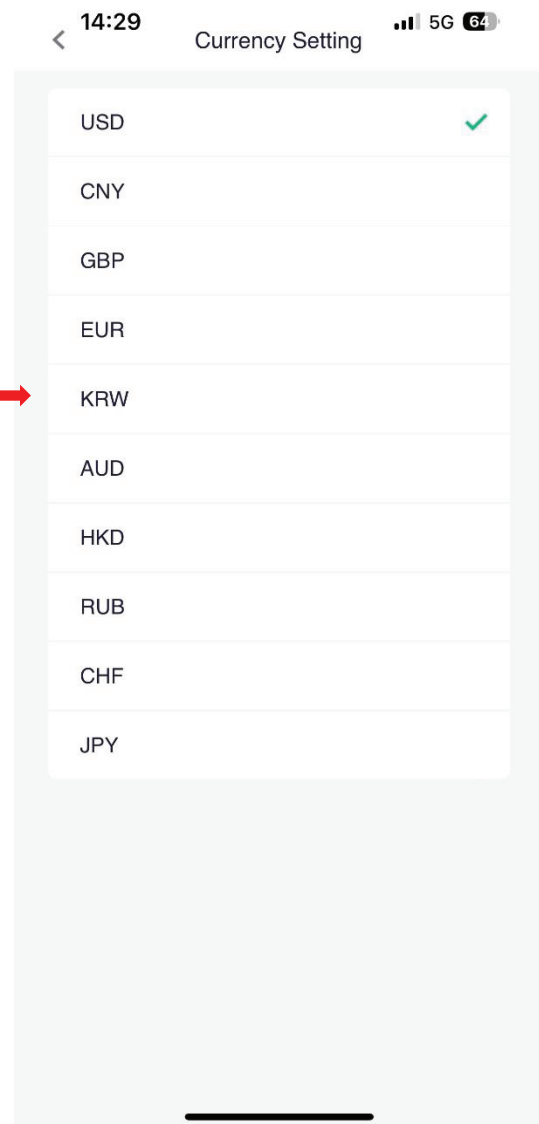
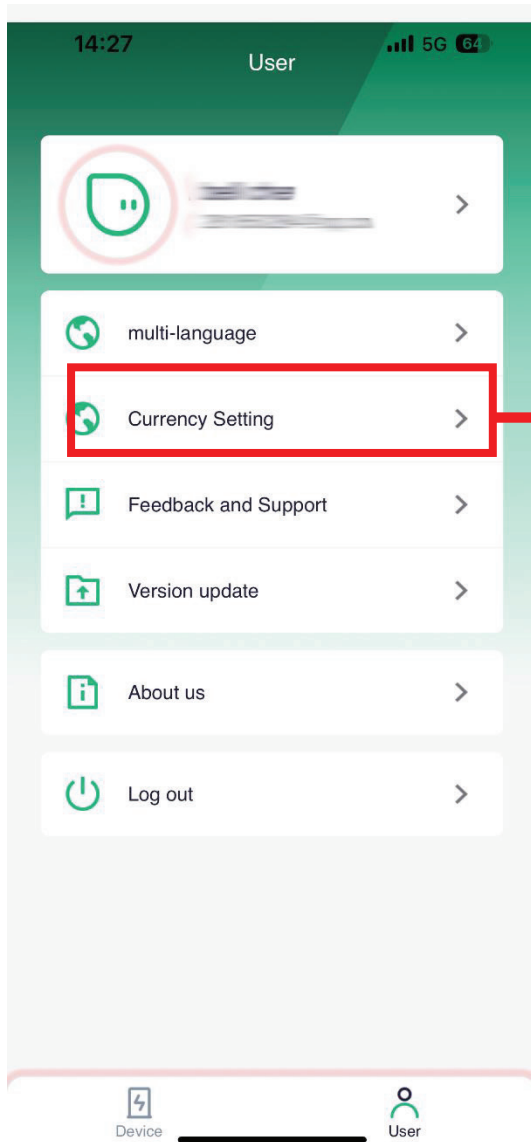


4. Feedback

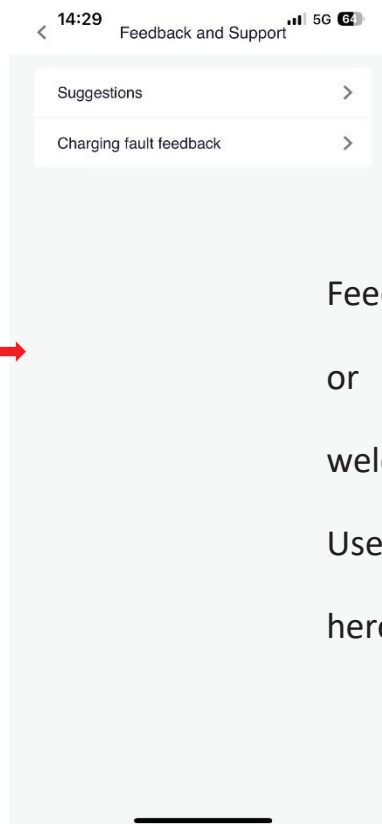
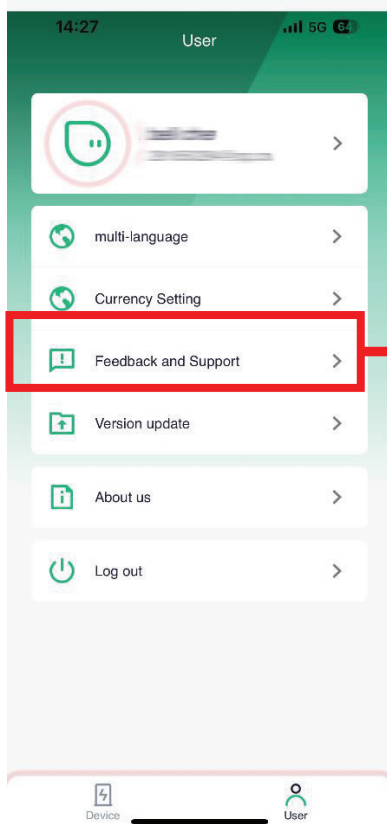


Feedbacks on this application or on products are warmly welcomed.



Users can also report faults here.

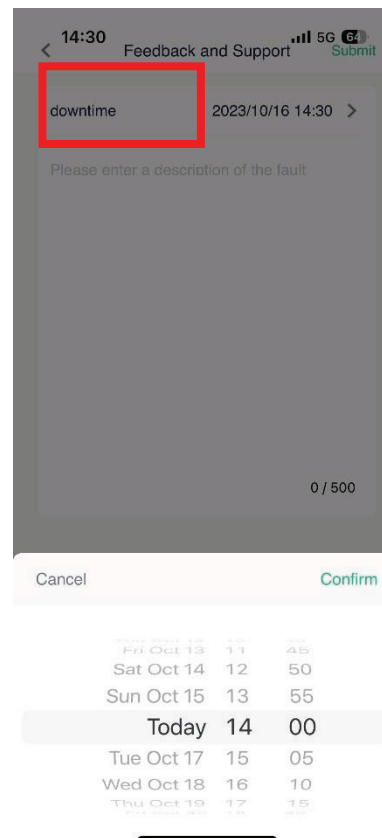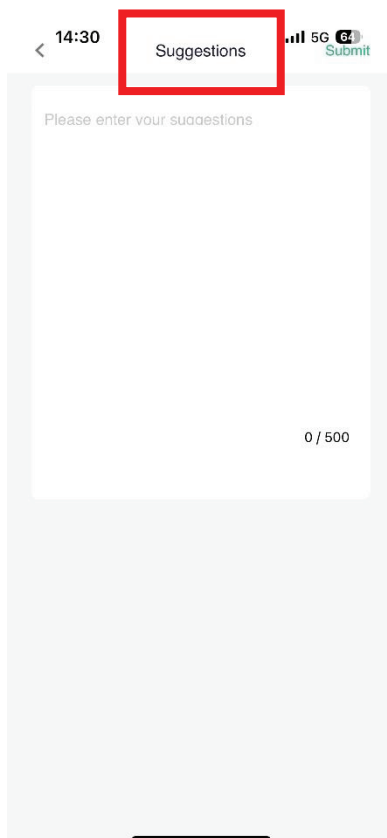



III To Bind Chargers

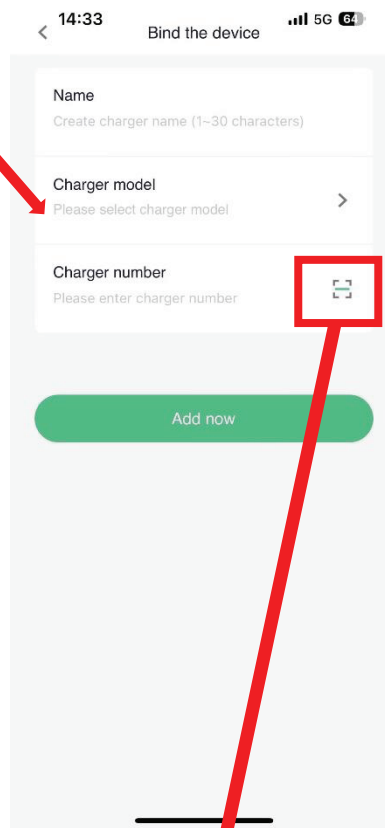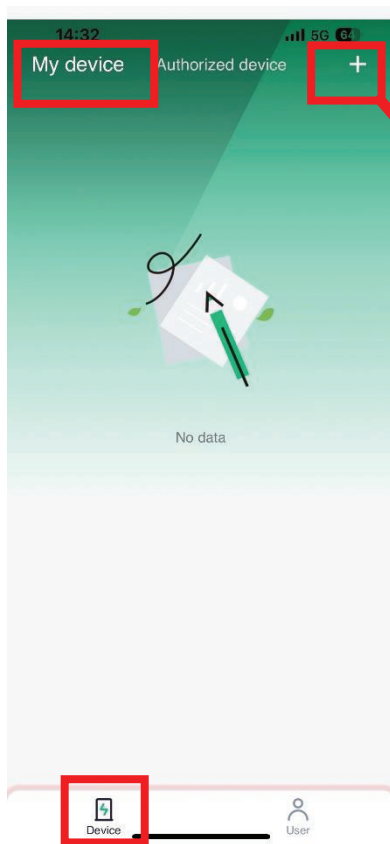

- Name the charger whatever you want.
- Choose the model.
- Scan the QR code on the charger to bind it. Make sure the Bluetooth of your phone has been turned on.

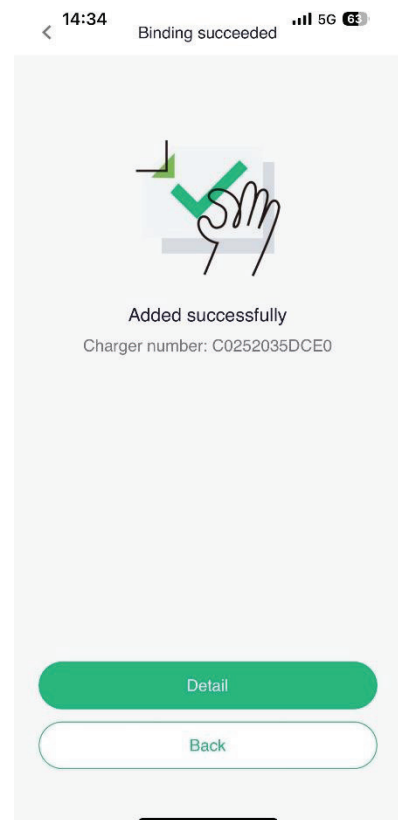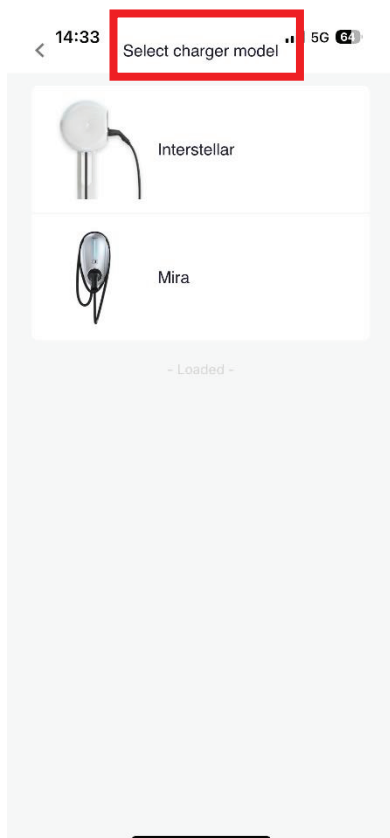


IV Charger Details

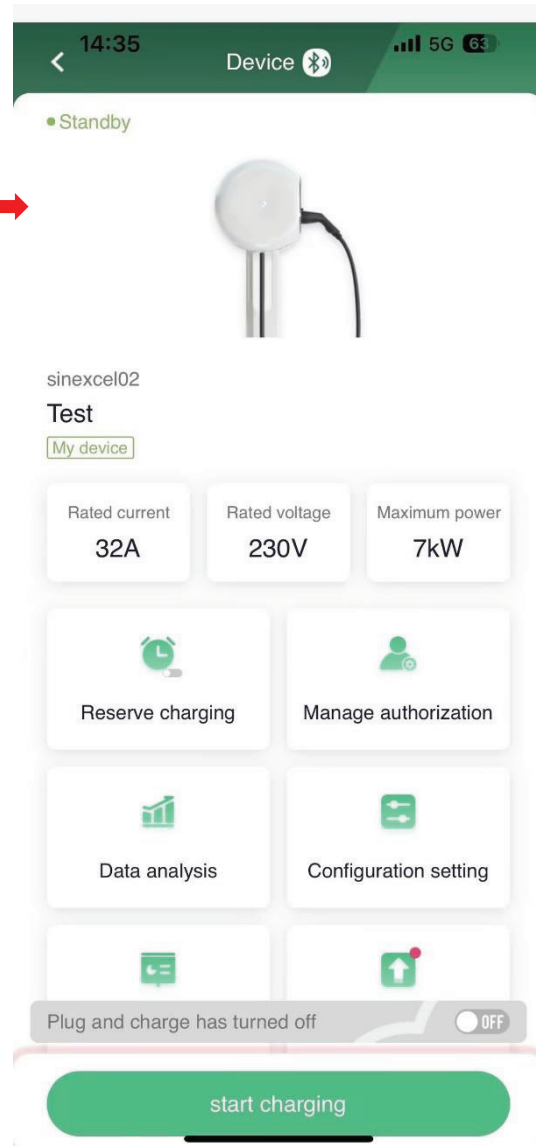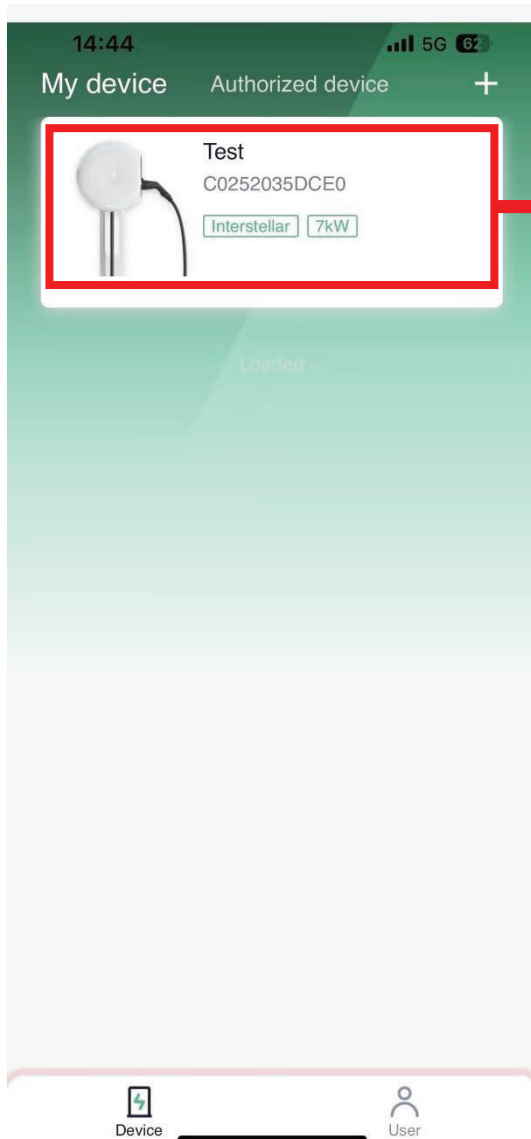

Note:



- A charger can be bound to one account only, while one account can bind multiple chargers.
- If you want to unbind the charger, please hold the bar and swipe left.

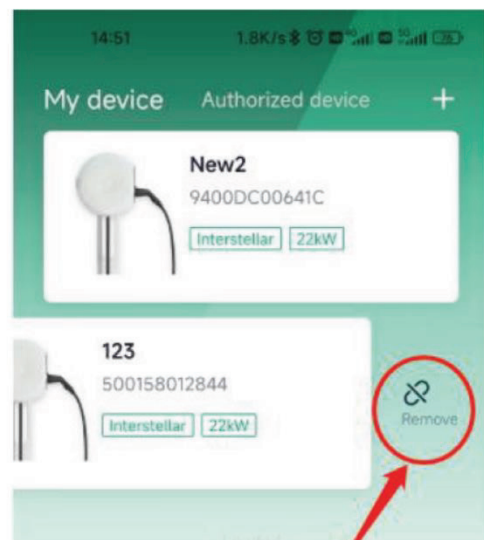



V Function Introduction

1. Start and Stop Charging





1) Plug and charge

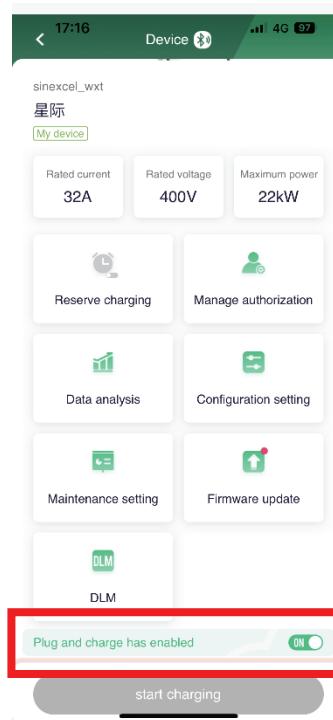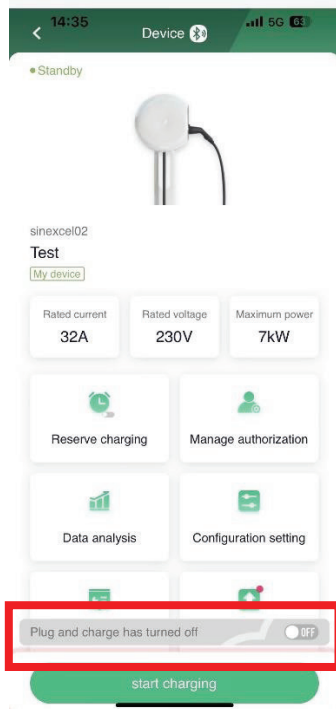


2) APP controlling

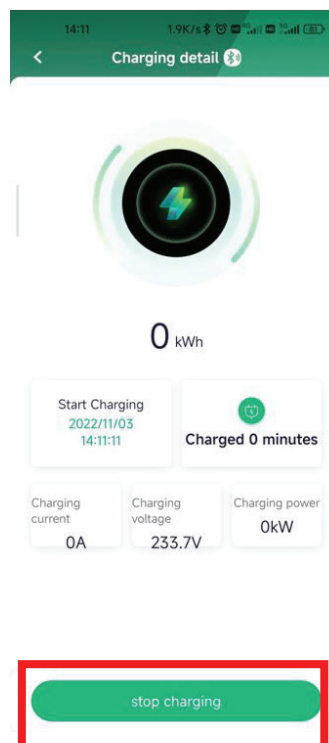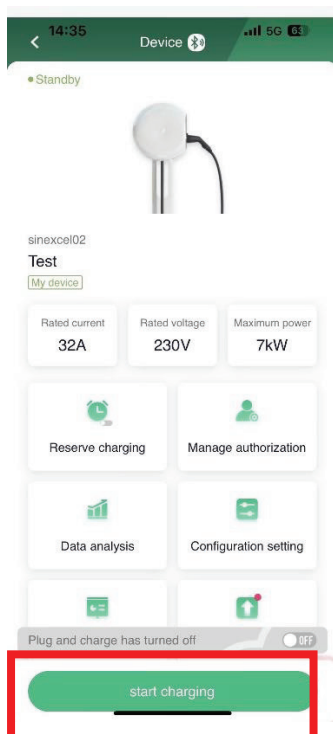

2. Reserve Charging

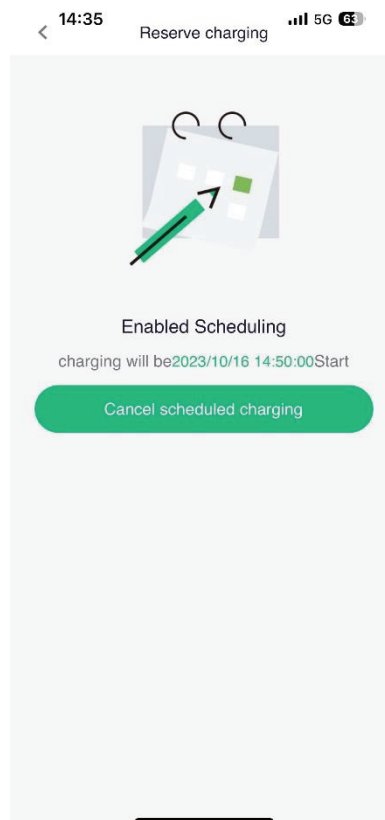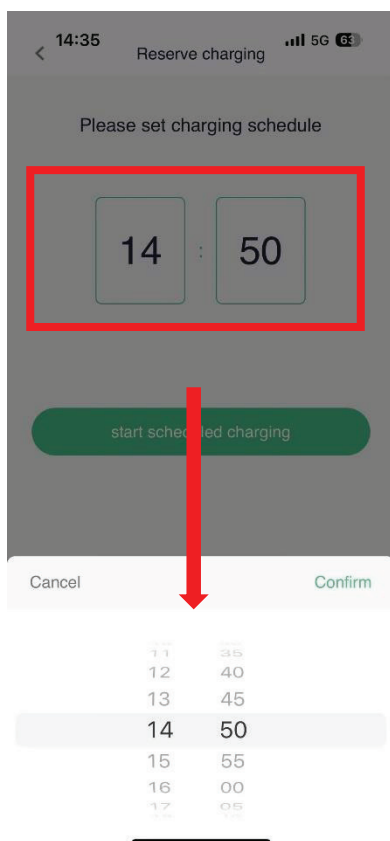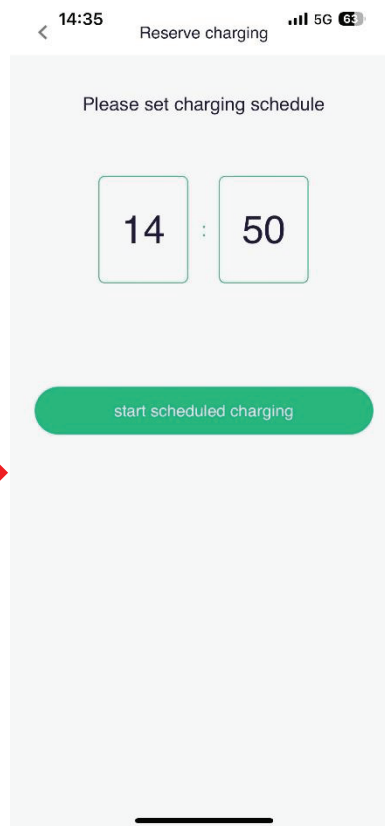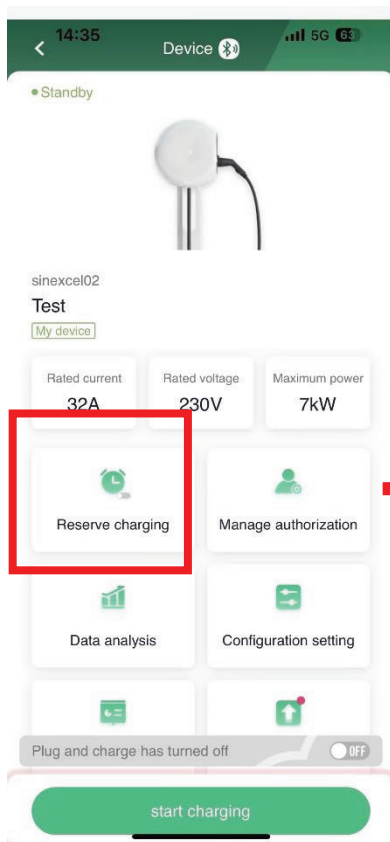



3. Manage Authorization

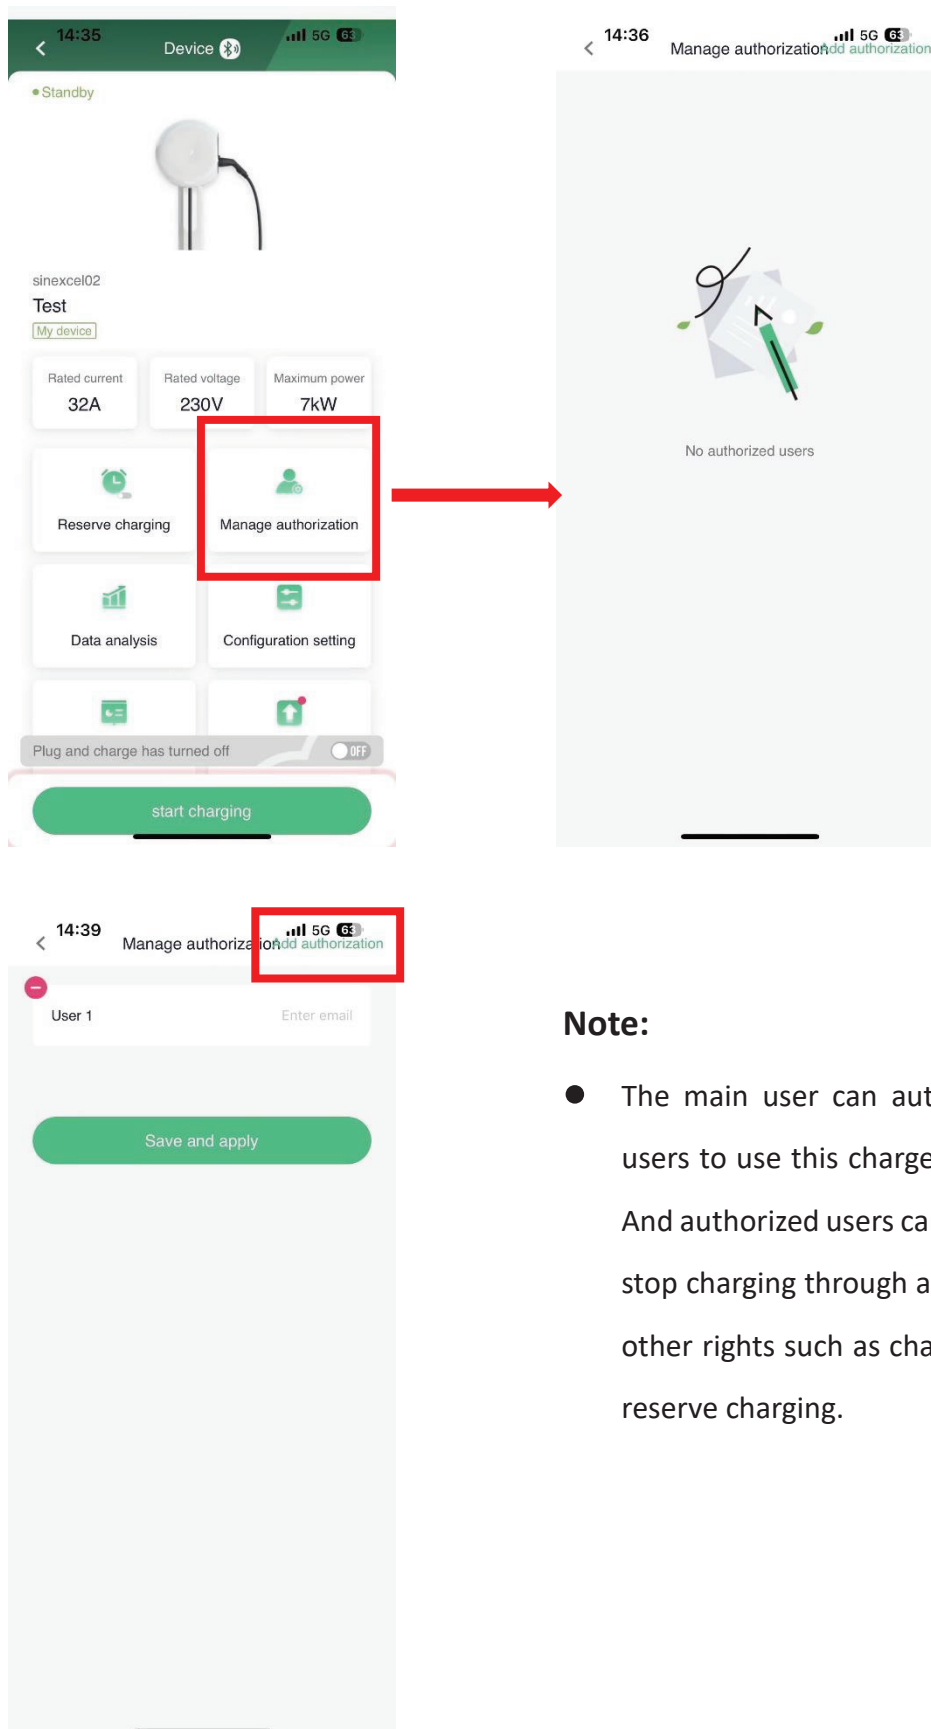




Note:

- The main user can authorize 5 other users to use this charger at maximum. And authorized users can only start and stop charging through app without any other rights such as change settings or reserve charging.


4. Data Analysis

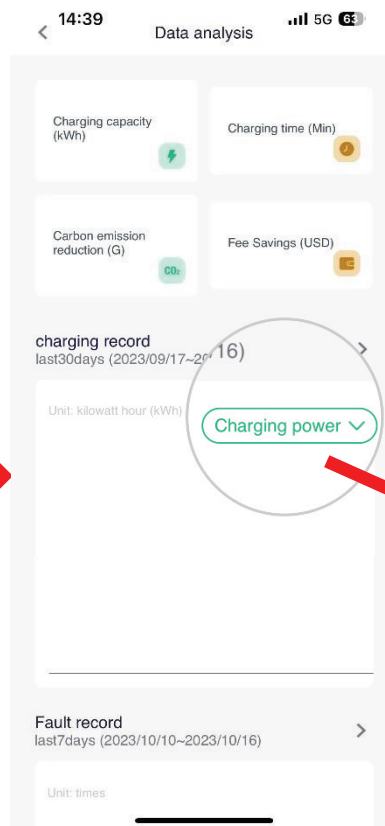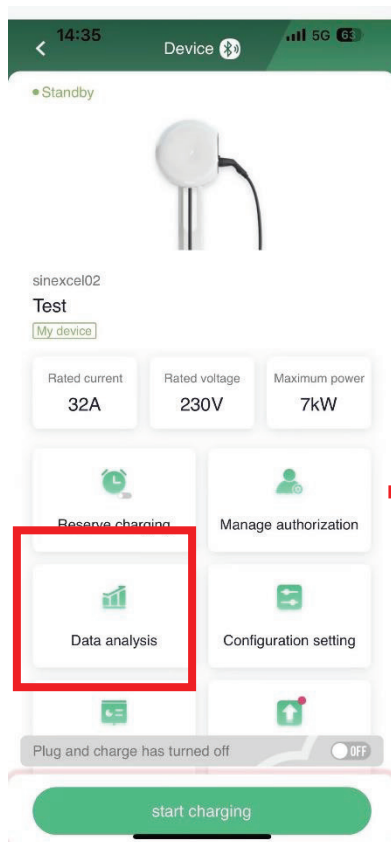





- Charging curves can be shown in different parameters.

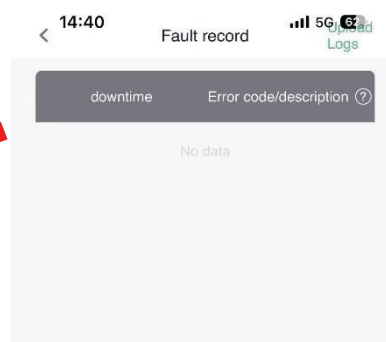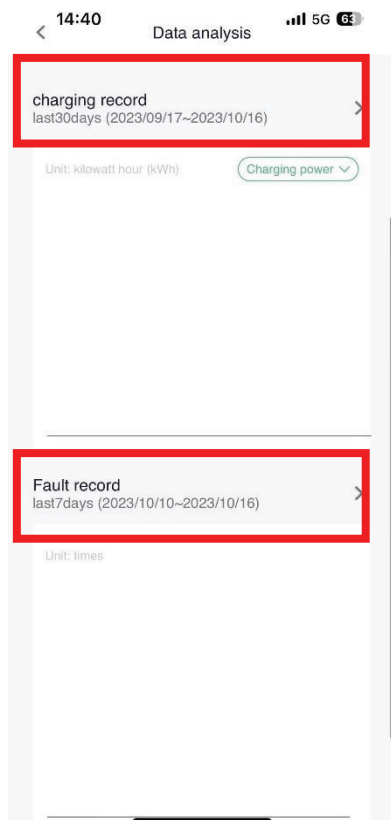
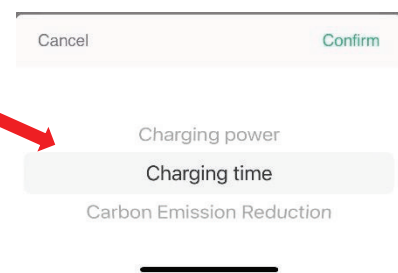


5. Configuration Setting

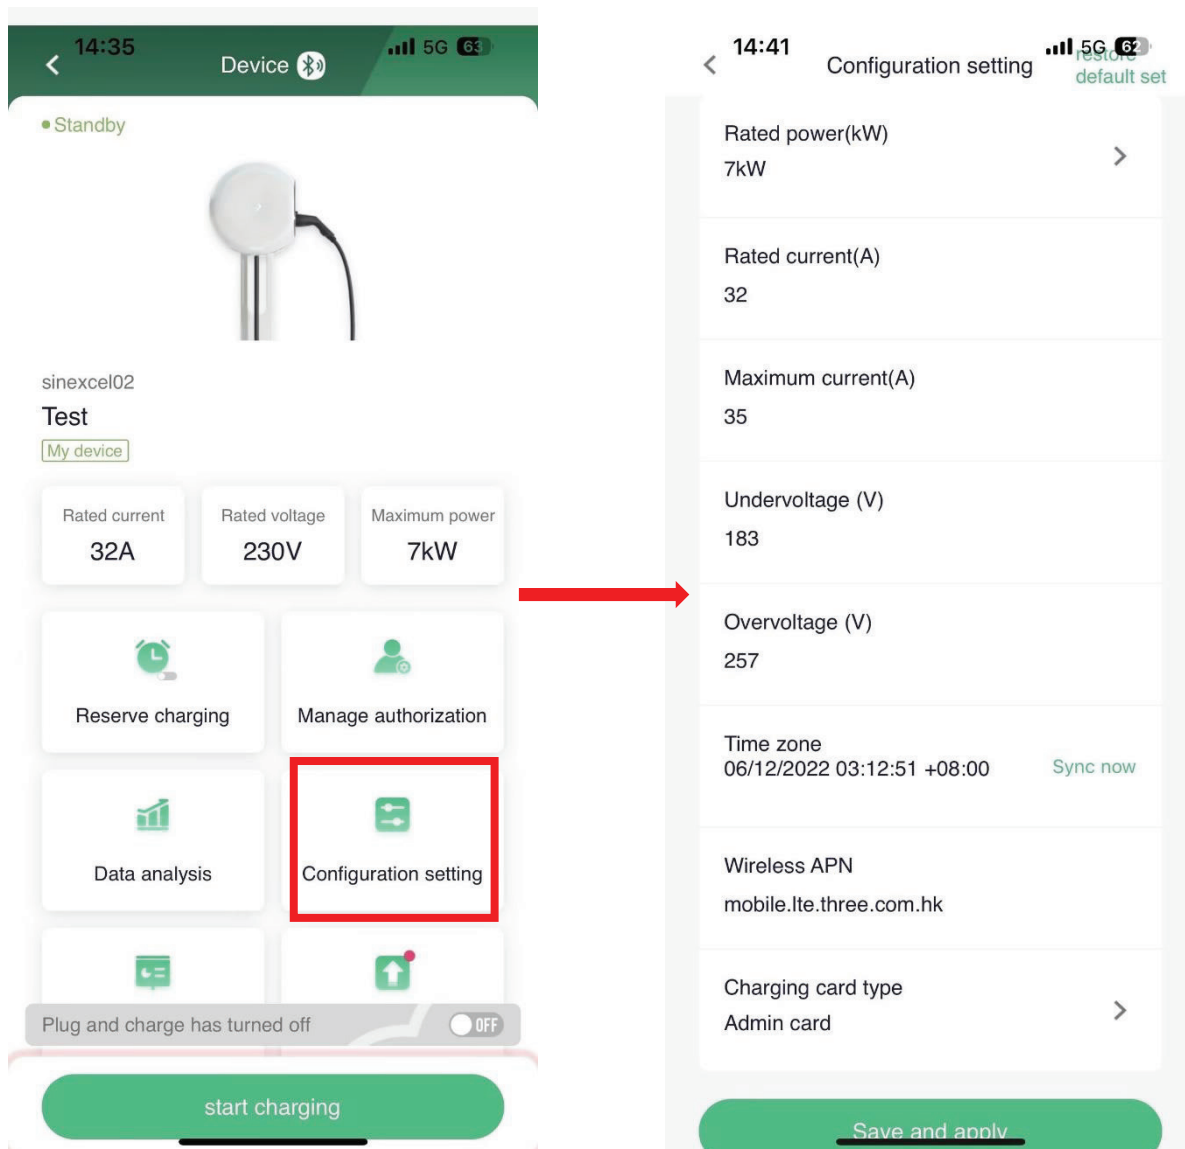




6. Maintenance Setting

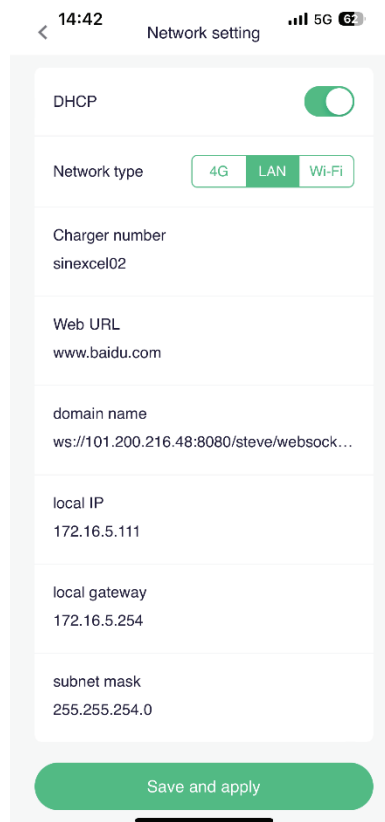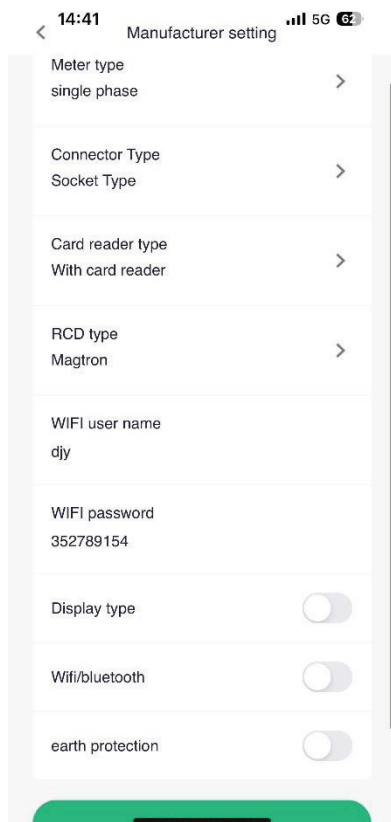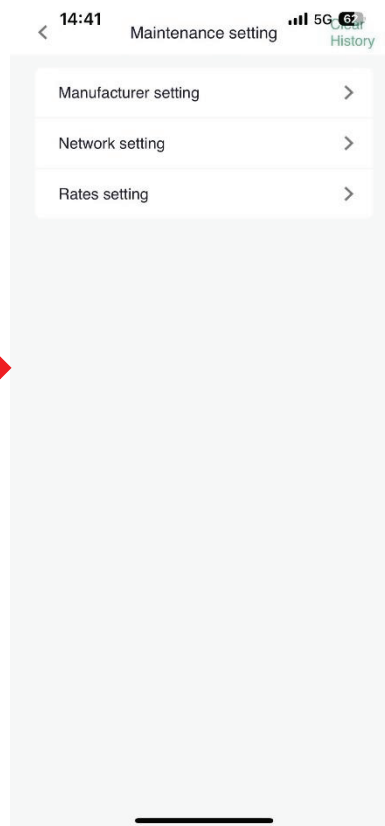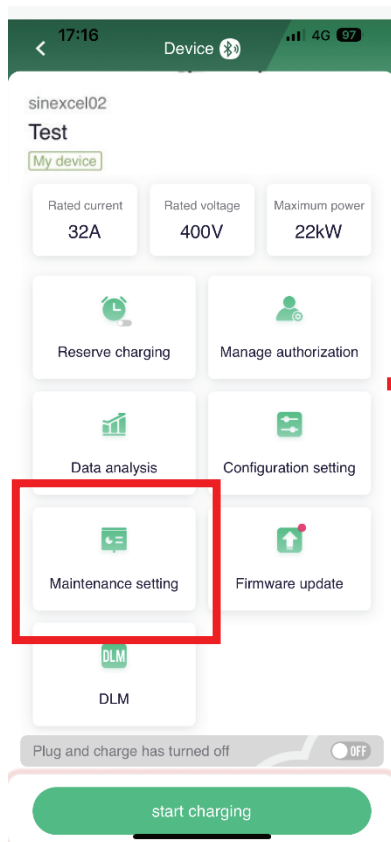

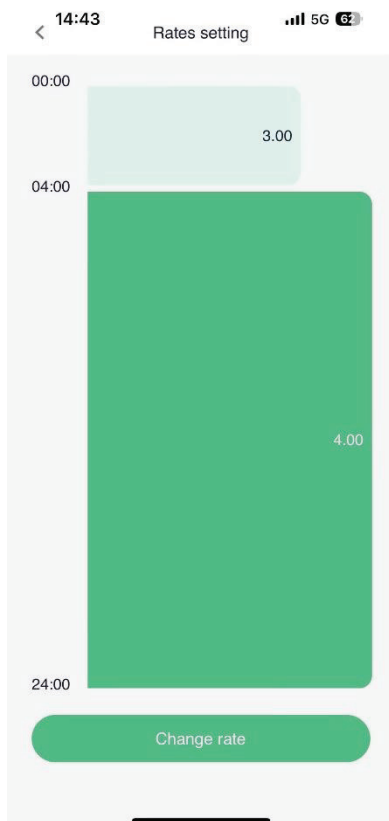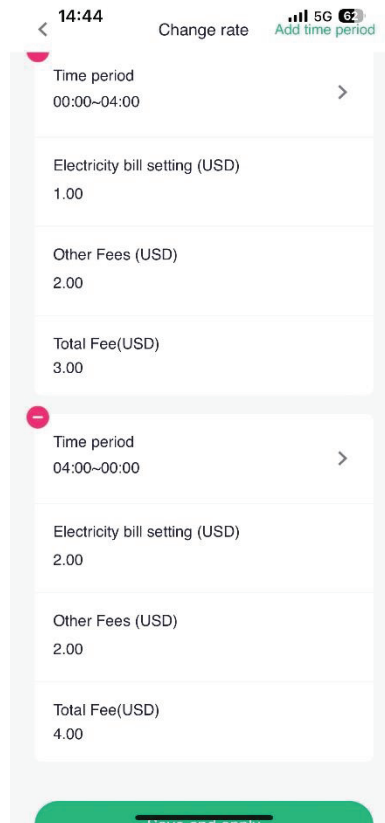

- Users can change fee rates according to different time period.

7. Firmware Update

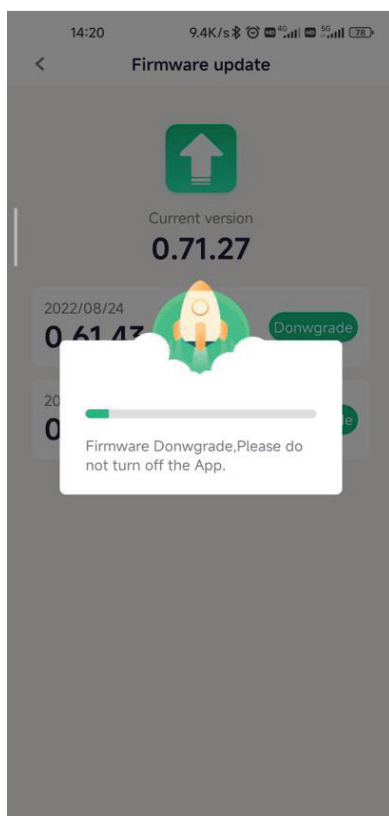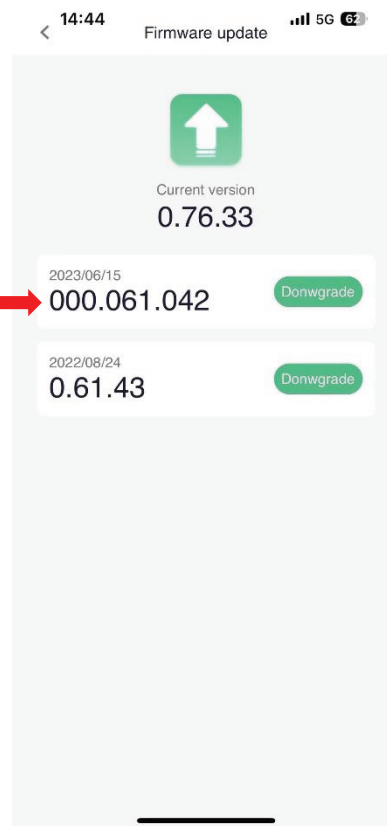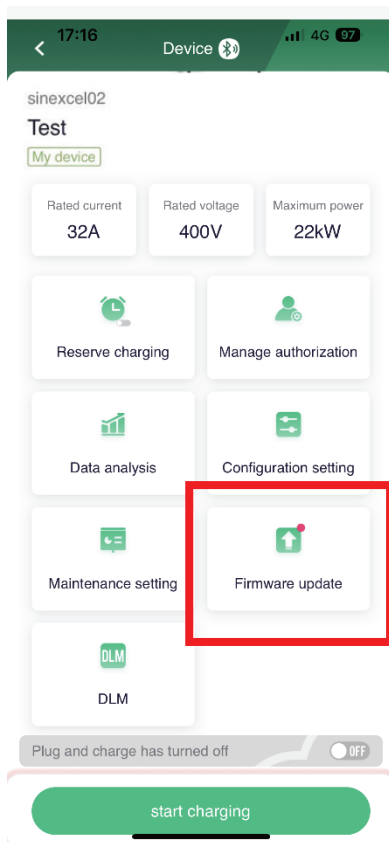

Shenzhen Sinexcel Electric CO., Ltd

Tel: +86-0755-86511588 Fax: 0755-86513100

Website: <https://en.sinexcel.com/>

Address: 6th Building, 2nd District, Baiwangxin High-tech Industry Park, Songbai Road,
Nanshan District, SHenzhen.